



4 Channel 5 Amp 12VDC Power Supply

L12DC4C5AB



Recommended Cable Prep

Ensure Positive [+] Wire Jacket Extends Beyond Bare Lead of Second [-] Wire.

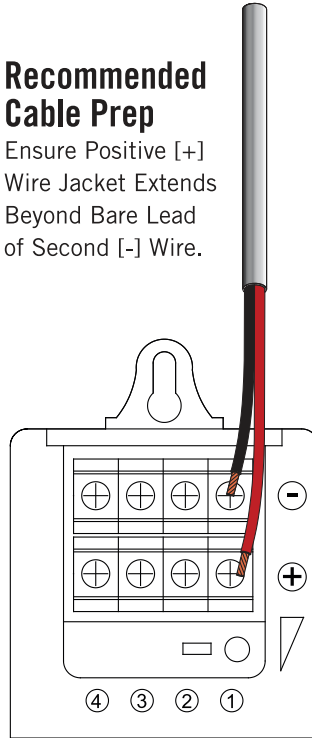

FEATURES

- ◆ 12 Volt DC Output
- ◆ 4 Channel, 5 Amp
- ◆ PTC Fuse Protection
- ◆ Input Voltage 100V~240V
- ◆ Bare Lead Connection
- ◆ LED Indication Light
- ◆ Indoor Only

SPECIFICATION	L12DC4C5AB
Number of Outputs	4
Input Voltage	AC 100V~240V
Adjustable Output Voltage	12 ~ 13.8 Volts DC
Output Current	5 Amp
Fuse Type	PTC 6-Amp
LED Indicator	Yes
Certificates	UL / CUL
Operating Temperature	-22°F ~ 113°F
Weatherproof Rating	Indoor Only
Dimensions (H x W x D)	6.5" x 2.12" x 1.37" / 165x53.9x34.8mm
Net Weight	.85lb / .39kg
Country of Origin	China

TECHNICAL SPECIFICATIONS

4 Ch **L12DC4C5AMC**

9 Ch **L12DC9C10AMC**

18 Ch **L12DC18C10AMC**



L12DC4C5AMC



L12DC9C10AMC



L12DC18C10AMC

FEATURES:

- ◆ 5 Amp Total, 1.25A/Ch Output (4Ch)
- ◆ 10 Amp Total, 1.1A/Ch Output (9Ch)
- ◆ 10 Amp Total, 560mA/Ch Output (18Ch)
- ◆ Resettable PTC Fused
- ◆ LED Channel Indicator
- ◆ Key & Lock Assembly
- ◆ Easy Connect 3-Prong Cord
- ◆ For Indoor Use Only
- ◆ UL/CUL Certifications

INCLUDED ACCESSORIES:

3-Prong power cord, 2x keys, Mounting template, Mounting hardware, Knockout Grommets, 2x Door Screws

SPECIFICATION	L12DC4C5AMC	L12DC9C10AMC	L12DC18C10AMC
Channels	4	9	18
Output Voltage	12 Volt DC		
Input Voltage	AC 120V 60Hz 1.25Amp	AC 120V 60Hz 2.5mp	
Potentiometer	Yes - (Range of 10VDC ~ 14VDC)		
Total Output Current	5 Amp	10 Amp	
Output Current Per Channel	1.25 Amp	1.1 Amp	560mA
Output Fuse Protection	PTC Resettable Fuses		
Maximum Fuse Rating	1.6 Amp	1.1 Amp	
Channel LED Indicator	Yes		
Protections	Over Power, Over Current, Over Voltage, Short Circuit		
Internal On/Off Switch	Yes		
Power Cord	Yes - Easy Connect 3-Prong power cord		
Key / Lock Assembly	Yes - Included		
Housing Dimensions	10.1" x 8.3" x 3.6" / 257 x 211 x 92mm		
Housing Material / Color	Metal / Beige		
Housing Knockouts - 1/2"	3 Top / 2 Left Side		
Certification	UL/CUL		
Operating Temp	14° ~ 104°F		
Weatherproof Rating	Indoor Only		
Net Weight	3.95lb / 1.8kg	4.2lb / 1.9kg	4.4 / 2kg
Country of Origin	Made in China		

PRODUCT DETAIL



TECHNICAL SPECIFICATIONS

L12VDC1A 1 Amp 12 Volt DC Power Supply



L12VDC2A 2 Amp 12 Volt DC Power Supply



FEATURES

- ◆ 1 Amp Output
- ◆ UL/CUL Listed
- ◆ Regulated Power Supply

FEATURES

- ◆ 2 Amp Output
- ◆ UL/CUL Listed
- ◆ Regulated Power Supply

L12VDC1A

L12VDC2A

L12DCCRD10PK


L12DCCON10PKF

L12DCCON10PKM

SPECIFICATION	L12VDC1A	L12VDC2A
Input	AC 100-240V 50/60HZ 0.3A Max	AC 100-240V 50/60HZ 0.5A Max
Output	12 Volts DC, 1Amp (Regulated)	12 Volts DC, 2Amp (Regulated)
Polarity	Center Pin Positive	
Dimensions	26mm x 73mm x 45mm (62 w/plug)	32mm x 73mm x 62mm (78 w/plug)
Net Weight	.2lb / .09kg	.25lb / .11kg
Weatherproof	Indoor Only	
Certifications	UL/CUL, LVL VI	
Country of Origin	Made in China	

12 Volt DC Power Connectors

L12DCCRD10PK 12VDC Male Bare Lead Adapter



L12DCCON10PKF 12VDC Female Bare Lead Connector



L12DCCON10PKM 12VDC Male Bare Lead Connector



SPECIFICATION	L12DCCRD10PK	L12DCCON10PKF	L12DCCON10PKM
Description	12VDC Male with 12" Bare Lead Cord	12VDC Female with Screw Terminal	12VDC Male with Screw Terminal
Polarity	Center Pin Positive		
Packaging	10-Pack		
Dimensions	φ10x305(mm)	35x12x15(mm)	36x12x12(mm)
Net Weight	.29lb / .13kg	.15lb / .07kg	.1b / .05kg
Country of Origin	Made in China		

L24AC50VA

24 Volt AC 50 VA Plug-in Transformer



FEATURES:

- ◆ Class II, UL Listed
- ◆ 120 Volt AC Input
- ◆ Screw Terminal Connection
- ◆ 50VA (2Amp) Output
- ◆ Wall Outlet Safety Screw
- ◆ For Indoor Use Only

L24AC50VA

SPECIFICATION	L24AC50VA
Type	Class II, UL Listed
Input	AC 120V
Output	24 Volt AC, 50VA (2 Amp)
Connection	Screw Terminal
Net Weight:	1.6lb / .72kg
Dimensions:	63.5x53.3x101(mm)
Certifications	UL/CUL
Weather Rating	Indoor Use Only
Country of Origin	Made in China

AC2450VA

L24VACTO12VDC1A

L24VACTO12VDC1A

24Volt AC to 12Volt DC Converter



L24VACTO12VDC1A

FEATURES:

- ◆ 20-30 VAC or 36 VDC Input
- ◆ 12 Volt, 1 Amp Max Output
- ◆ Bare Lead Input to DC Male Output
- ◆ Overload & Short Circuit Protection
- ◆ Indoor Use Only

SPECIFICATION	L24VACTO12VDC1A
Input Voltage	20~30 Volt AC or 36 Volt DC
Output Voltage/Current	12 Volt DC / 1 Amp Max
Input Connection	Bare Lead
Output Connection	Single - Bare Lead w/4" DC Connector
Protections	Isolated Filter, Overload & Short Circuit
Certifications	CE, RoHS
Operating Temperature	-14°F ~ +114°F
Net Weight	.1lb / .05kg
Dimensions	76x30x23(mm)
Weatherproof Rating	Indoor Use Only
Country of Origin	Made in China

TECHNICAL SPECIFICATIONS



LGLC




This Video Ground Loop Corrector reduces Ground Loop Interference with TVI, CVI, AHD & 960H Analog signals. It is easy to install in new or existing systems and useful where a video signal is transmitted via cable between points with different ground potentials.

SPECIFICATION	LGLC
Insertion Loss	0.5dB
Frequency Response	0-3dB at 10Mhz
Connections	BNC male to BNC Female
Isolation Voltage	600VDC (Min.)
Insulation resistance	100M ohm
Transient Voltage Suppressors	12V rms
Dimensions (W/H/D)	2.4" x 1.2" x 0.9" (Body Only)
Weight	.15lb / .07kg
Country of Origin	Made in China

FEATURES

- ◆ BNC Male to BNC Female Connections
- ◆ 12V rms Transient Voltage Suppressor
- ◆ 600VDC Isolation Voltage

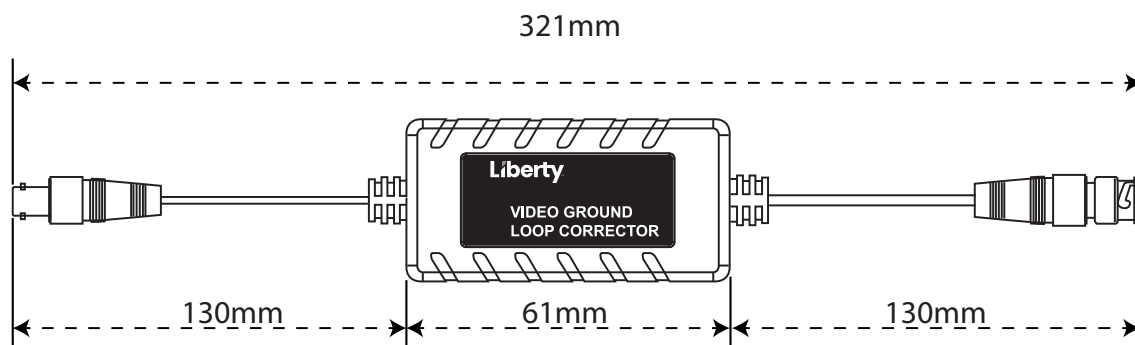

TECHNICAL SPECIFICATIONS



LVBPAIR

Video Balun with Bare Lead to 4" BNC Pigtail



LVBPAIR

LVBPAIR

LVPBPAIR

SPECIFICATION	LVBPAIR
Connections	Screw Terminal to BNC Male w/4" Pigtail
Video Signal	1Vp-p, 75 Ohms
Transmission Distance	350M (960H/720P), 250M (1080P), 200M (4MP-5MP)
ESD Protection	30KV (Air), 15KV (Contact); IEC 61000-4-2 Compliant
Cable Type	For Use with CAT5e/CAT6 UTP (Unshielded Twisted Pair)
EFT Protection	40A (5/50ns); IEC 61000-4-4 Compliant
Lightning Protection	2A (8/20µs); IEC 61000-4-5 Compliant
Surge Protection Attack Time	< 1nS
Dimensions	7.2" x 0.6" x 0.5" / 113mm x 16mm x 13mm
Net Weight	.1lb / .04kg
Country of Origin	Made in China

FEATURES:

- ◆ BNC Male to Screw Terminal
- ◆ 4' BNC Pigtail
- ◆ Passive, no Power Required
- ◆ 350M (960H/720P), 250M (1080P)
- ◆ 200M (4MP-5MP)
- ◆ Passive, No Power Required
- ◆ Built-in ESD, EFT & Transient Protection



LVPBPAIR

Video/Power Balun with RJ45 to 4" BNC Pigtail & Power Leads



LVPBPAIR

FEATURES:

- ◆ BNC Male to RJ-45
- ◆ 6' BNC Pigtail
- ◆ DC Male & DC Female Power
- ◆ Passive, no Power Required
- ◆ 350M (960H/720P), 250M (1080P)
- ◆ 200M (4MP-5MP)
- ◆ Passive, No Power Required
- ◆ Built-in ESD, EFT & Transient Protection

SPECIFICATION	LVPBPAIR
Connections	Video: RJ-45 to BNC Male w/ 6" Pigtail Power: 12VDC Male to 12VDC Female
Video Signal	1Vp-p, 75 Ohms
Transmission Distance	350M (960H/720P), 250M (1080P), 200M (4MP-5MP)
ESD Protection	30KV (Air), 15KV (Contact); IEC 61000-4-2 Compliant
Cable Type	For Use with CAT5e/CAT6 UTP Cable
Supports 12VDC & 24VAC Power	Supports 12VDC & 24VAC Power
EFT Protection	40A (5/50ns); IEC 61000-4-4 Compliant
Lightning Protection	2A (8/20µs); IEC 61000-4-5 Compliant
Surge Protection Attack Time	< 1nS
Dimensions	81mm x 20mm x 30mm (body) w/ 6" BNC & Power Pigtails
Net Weight	.2lb / .09kg
Country of Origin	Made in China

LVPBPAIR Distance/Voltage Requirements

Distance	Desired Voltage / Amperage		
	12VDC / 0.5A	12VDC / 1Amp	12VDC / 1.5A
	Starting Voltage Required		
50M	13.5V	15.5V	17.0V
100M	15.5V	18.5V	22.0V
150M	17.0V	22.0V	27.0V
200M	18.5V	25.5V	32.0V
300M	22.0V	30.0V	42.0V



Interlocking Design

Pre-Made RG59U Patch Cables & BNC Connectors

LBNC3F

RG59U Patch Cable
3-Foot Cable Length
BNC Male to Male



LBNC3F

LBNC6F

SPECIFICATION	LBNC3F	LBNC6F
Length	3'	6'
Application	Video	
Jacket	PVC	
Connectors	BNC to BNC	

LBNC6F

RG59U Patch Cable
6-Foot Cable Length
BNC Male to Male

LBNCRIMP10PK

10 Pack, BNC Male
2-Piece Crimp Connector for RG59



LBNCRIMP10PK

LBNCTWIST10PK

10 Pack, BNC Male
Twist-on Connector for RG59



LBNCTWIST10PK

LBNCSPICE5PK

5 Pack, BNC Female to
Female Splice Connector



LBNCSPICE5PK

LBNCT5PK

5 Pack, 1x BNC Male to
2x BNC Female Adapter



LBNCT5PK

LBNCFTORCAM5PK

5 Pack, BNC Female to
RCA Male Adapter



LBNCFTORCAM5PK

LBNCMTORCAF5PK

5 Pack, BNC Male to
RCA Female Adapter



LBNCMTORCAF5PK

LBNC3F

LBNC6F

LBNCRIMP10PK

LBNCTWIST10PK

LBNCSPICE5PK

LBNCT5PK

LBNCFTORCAM5PK

LBNCMTORCAF5PK